



ADJUSTABLE STILTS

THE KNEE BRACE IS ADJUSTABLE TO FIT DIFFERING SIZED STILTERS

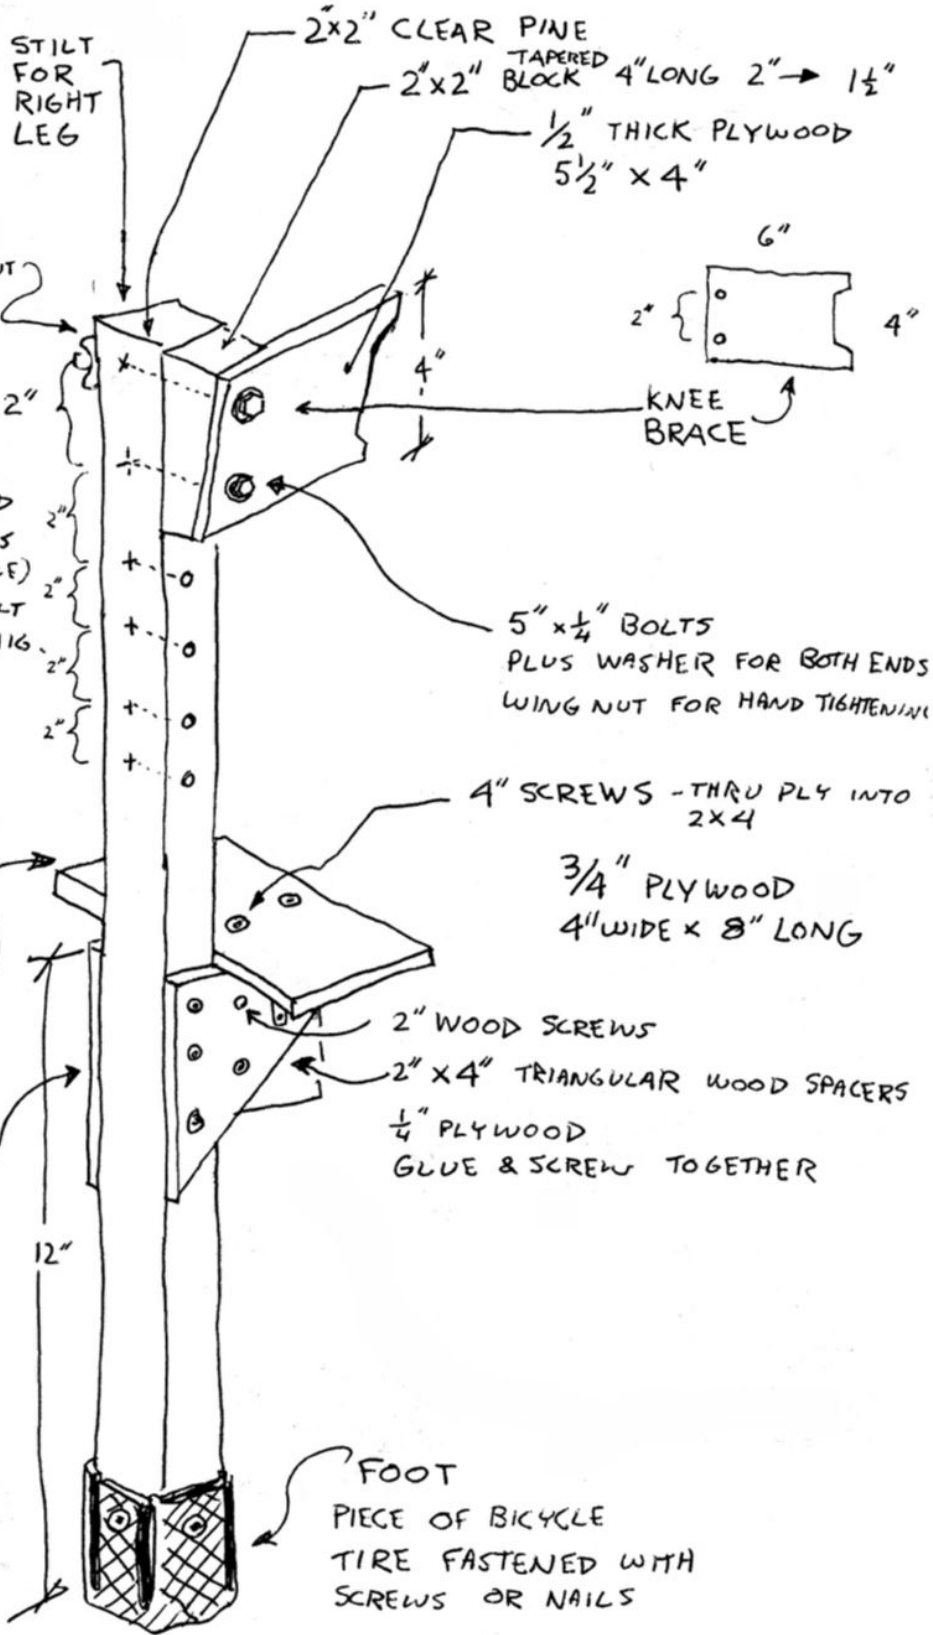

CRITICAL
THE BOLT HOLES MUST BE CAREFULLY DRILLED (SQUARE) AND EXACTLY TWO INCHES APART - (TO BE ADJUSTABLE)

NOTE USE KNEE BRACE BOLT HOLES AS DRILLING JIG

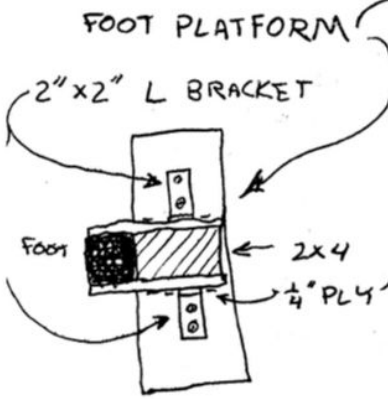

BOTTOM OF STILT

SHADOWLAND
2005


FOOT
PIECE OF BICYCLE
TIRE FASTENED WITH
SCREWS OR NAILS

SHADOWLAND

ADJUSTABLE STILTS

MATERIALS LIST

- a) 2 pcs 30"-32" 2x2 clear pine (sticks)
- b) 2 pcs 2"x2" x4" (Tapered blocks)
- c) 2 pcs 6"x4" 1/2" ply (knee brace)
- d) 4 pcs 5" x 1/4" bolts
8 pcs washers
4 pcs 1/4" wing nuts
- e) 2 pcs 4"x8" 3/4" plywood
4 pcs 4" screws
4 pcs 2" L brackets
16 pcs 3/4" screws
- d) 4 pcs 6"x6" triangle 1/4" plywood
24 pcs 2" wood screws
- e) 2 pcs 4"x4" 2x4
- f) 2 pcs bicycle tire for stilt foot.

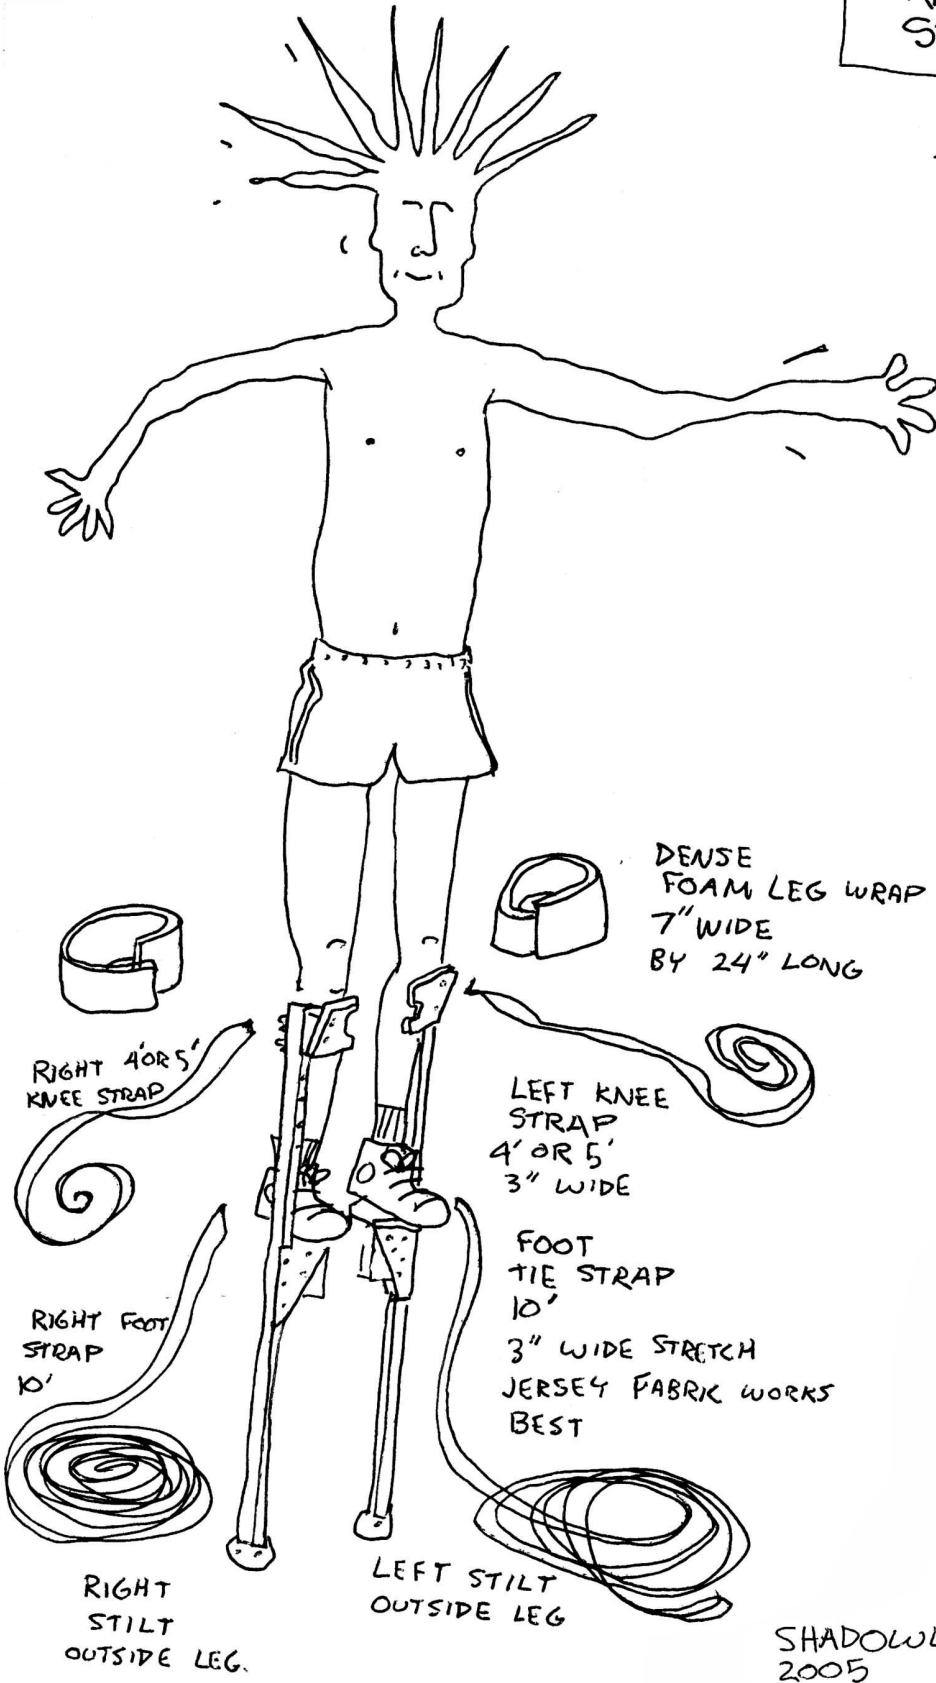

DENSE
FOAM LEG WRAP
7" WIDE
BY 24" LONG

LEFT KNEE
STRAP
4' OR 5'
3" WIDE

FOOT
TIE STRAP
10'
3" WIDE STRETCH
JERSEY FABRIC WORKS
BEST

RIGHT
STILT
OUTSIDE LEG.

LEFT STILT
OUTSIDE LEG

SHADOWLAND
2005

